


Vulkollan Polyurethane Driven Wheel 300mm 1240Kg Load

Product code: VULW300-50-60-KM50

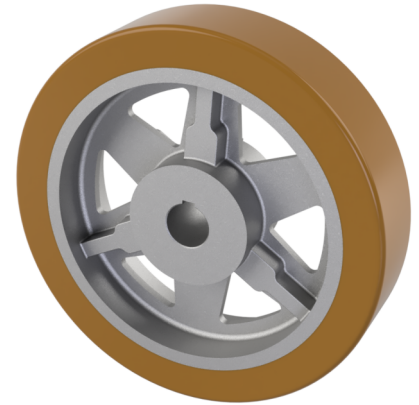

Vulkollan polyurethane tyre on a colturiet painted cast iron centred wheel with a keyway. Diameter 300mm, Tread Width 50mm, Hub Width 60mm, Hub Diameter 90mm, Keyway Bore 50mm, Load Capacity 1240kg. PLEASE NOTE Keyway Bore SIZE TOLERANCES ARE BASED ON H7 (0 +0.025) DIN6885 ISO 286-2 STANDARD

Wheel Material	Polyurethane on Cast Iron
Diameter (mm)	300
Hub Width (mm)	60
Bore Size (mm)	50
Tread (mm)	50
Colour / Shore Hardness	Vulkollan Polyurethane on Cast Iron / 90 Shore A
Temperature Resistance	-20 °C TO +80 °C
Bearing Type	Keywayed
Hub Diameter (mm)	90
Load Capacity (kg)	1240