


Vulkollan Polyurethane Driven Wheel 400mm 2570Kg Load

Product code: VULW400-80-80-KM60

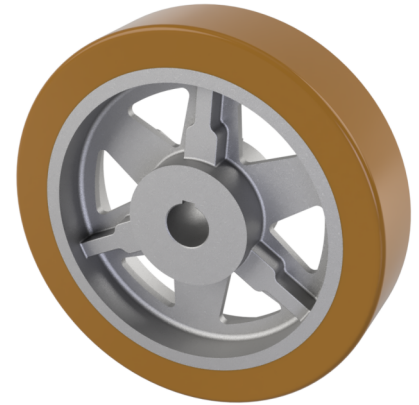

Vulkollan polyurethane tyre on a colturiet painted cast iron centred wheel with a keyway. Diameter 400mm, Tread Width 80mm, Hub Width 80mm, Hub Diameter 105mm, Keyway Bore 60mm, Load Capacity 2570kg. PLEASE NOTE Keyway Bore SIZE TOLERANCES ARE BASED ON H7 (0 +0.030) DIN6885 ISO 286-2 STANDARD

Wheel Material	Polyurethane on Cast Iron
Diameter (mm)	400
Hub Width (mm)	80
Bore Size (mm)	60
Tread (mm)	80
Colour / Shore Hardness	Vulkollan Polyurethane on Cast Iron / 90 Shore A
Temperature Resistance	-20 °C TO +80 °C
Bearing Type	Keywayed
Hub Diameter (mm)	105
Load Capacity (kg)	2570

BIL GROUP LTD

Porte Marsh Road, Calne, Wiltshire, SN11 9BW

Registered in England No: 2603821

VAT Reg: GB572705729

