


## ACP35RH DATASHEET

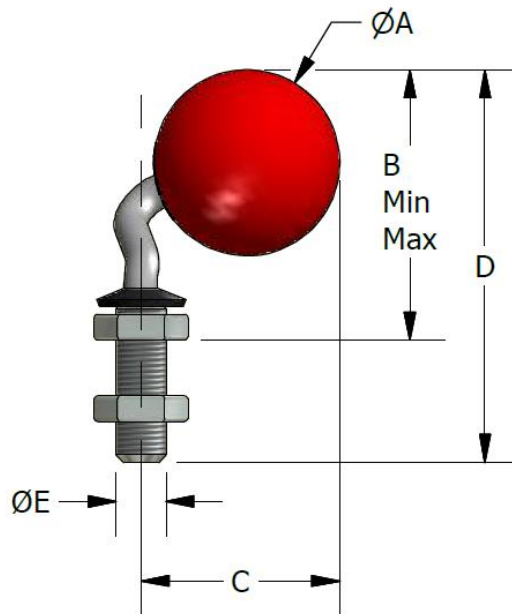

Fixing: Drill a  $\varnothing 14$ mm hole. Fix socket and adjust height.

PART No.	WEIGHT (Kgs)	$\varnothing A$ (mm)	B (mm)		C (mm)	D (mm)	$\varnothing E$ (mm)
			Min	Max			
ACP35RH	0.11	$\varnothing 35$	55	77	38	88	$\varnothing 13.5$ (M14x1.5)

### MAXIMUM DYNAMIC LOADING – BALL UP

Red polyurethane ball 15kgs

### MATERIALS

Ball – Polyurethane red colour with hardness of 35 shore D

Insert – Polypropylene black colour

Washer - Rubber

Stem – Mild steel with BZP finish

M14x1.5mm threaded sleeve reduced to  $\varnothing 13.5$ mm – Mild steel with BZP finish

M14x1.5mm nut – Mild steel with BZP finish

### KEY FEATURES

Height adjustable

Low noise operation

Ensures the smooth movement of sheet materials with a delicate or polished surface such as glass, granite, wood, plastic, paper and card etc.

Maximum operating temperature of +60°C